
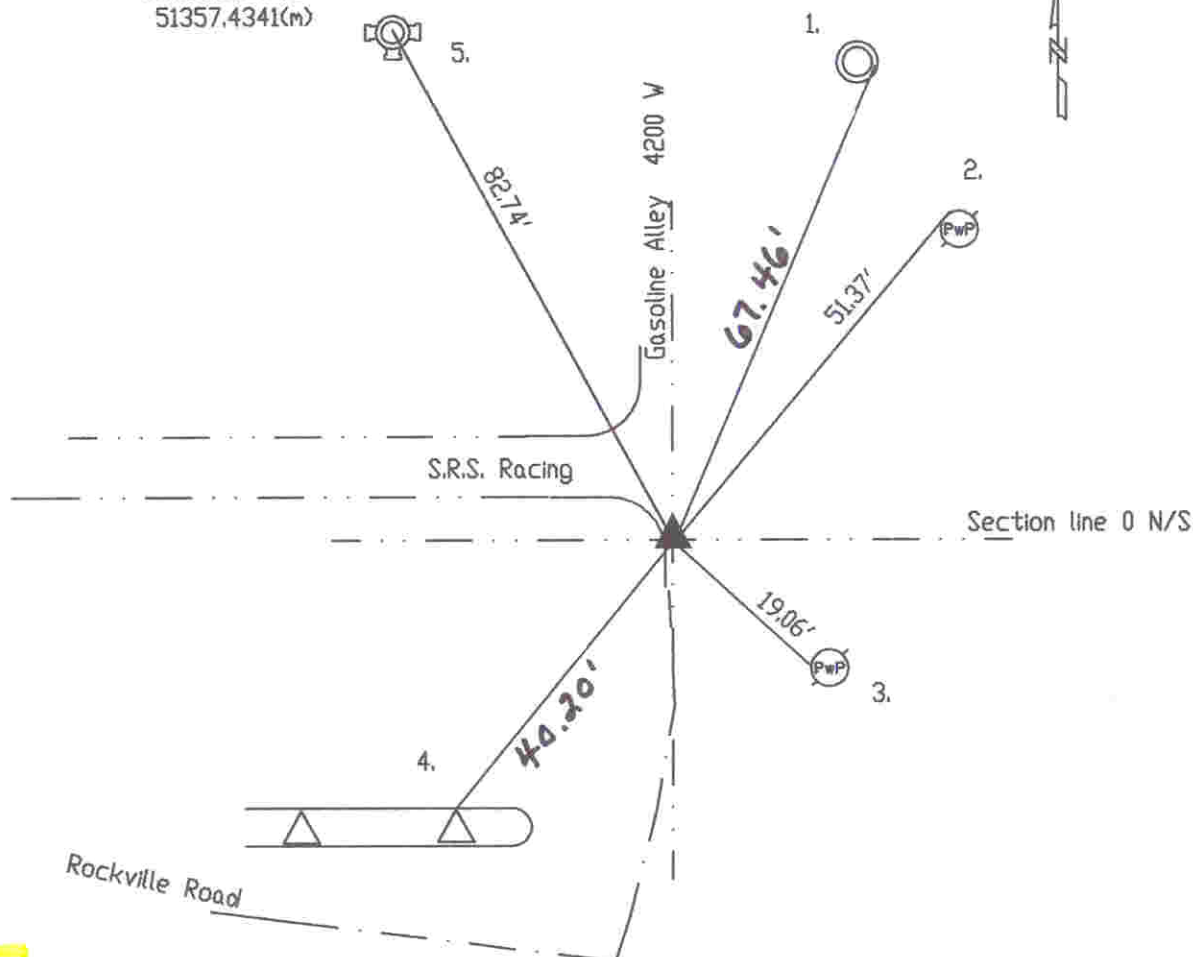


```
IN. S.P.C. E ZONE, NAD 83
NAME:      15030801
N:         501501.6864(m)
E:         51357.4341(m)
```

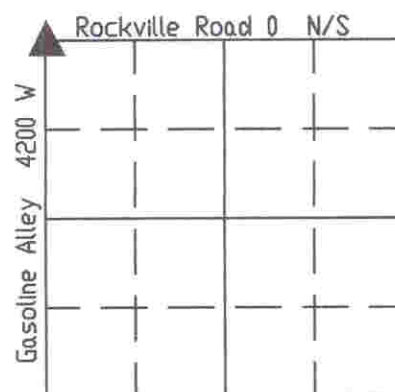

Original post set 1820 by Wm. Laughlin with witnesses: 12" walnut S 25 W 1.3 links, 24" sycamore S 3 E 1.10 links per Marion County Atlas pg. 6. Hosbrook 10-28 & 29=1850 called stone per Wayne Township Legal Survey Book pg. 35. 9-17-64 called axle. 7-8-80 called same. Excavated 8-24-88 axle found 3" down, and set Harrison. Harrison broken off and replaced 6-23-95 by Wilcoxen. Re-tied corner 7-11-99 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	67.46'	Cut 'x' E-edge telephone manhole rim
2.	51.37'	Mag nail w/brass washer NW PwP#1-528A 12'up
3.	19.06'	Mag nail w/brass washer W PwP#570-528B 12'up
4.	40.20'	Most northerly corner metal base of sign post.
5.	82.74'	Top nut of fire hydrant